



VECTAWAY® GANGWAY

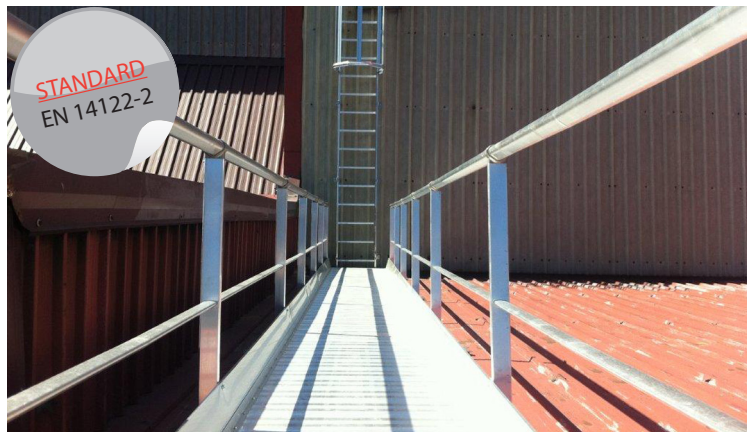

Example of assembly:

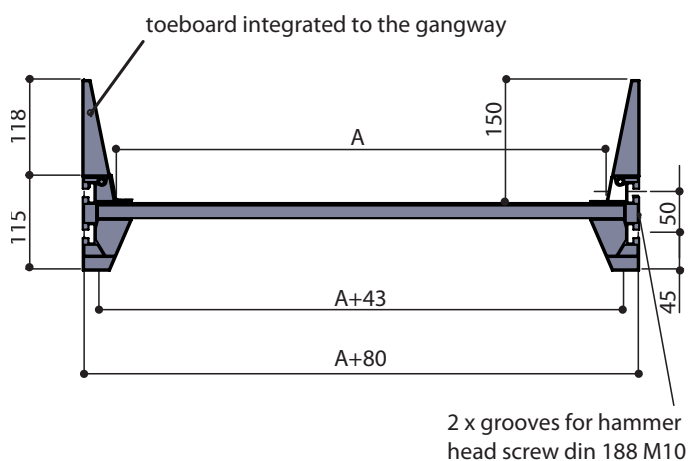

Models:

A = Size	Size	Weight	References
	600 mm	14 kg ml	03099
	800 mm	16 kg ml	03100

Advantages:

- Multipurpose.
- The fixation the gangway and guardrails is simple thanks to the grooves.
- Easy to install.
- Can be used with guardrails on one side or both sides.


Use:

VECTAWAY® gangway has been designed to enables moving on fragile and slippery roofs in complete safety.

Technical features:

- Material: Aluminium 6063 T6.
- Centre distance of fixation: 3 m max.
- Fabrication compliant with the European standard EN 14122-2.
- VECTAWAY® gangway can be used with an inclination angle from 0° to 20°.
- VECTAWAY® gangway is available with or without toe-board.
- Model available with width of 600 or 800 mm.
- Safety gate optional.
- VECTACO® parapet guardrail (Ref: VA-D2) optional.
- Fixation on metal deck, asbestos cement, standing seam roof or any type of support upon request.


Example of assembly:

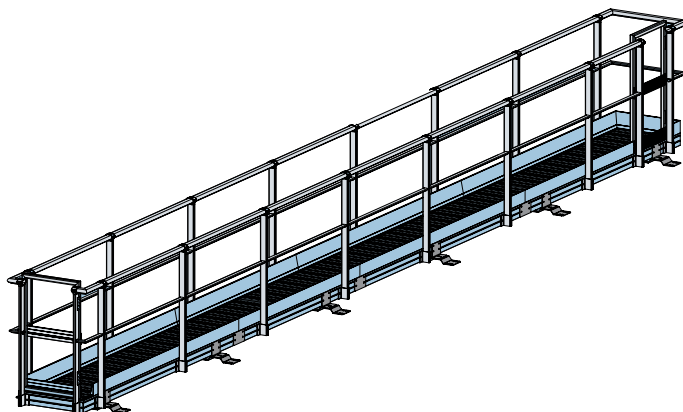

VECTAWAY® GANGWAY


VECTAWAY® gangway components:

Fixation on metal deck, bracket, self-drilling screw and sealing joint

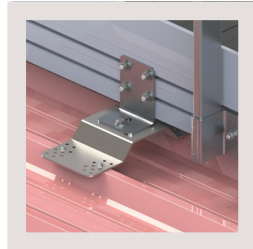


Ref.: 03231

Fixation asbestos cement

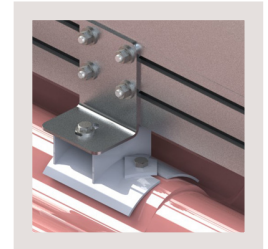


Ref.: 03232

Fixation standing seam and fastenings

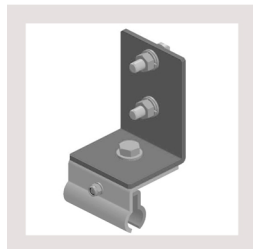


Ref.: 01834

Junction plate and fastenings

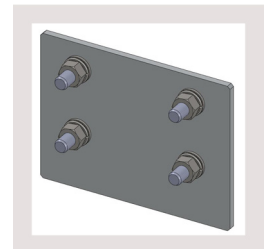


Ref.: 03097

Fixation standard bracket

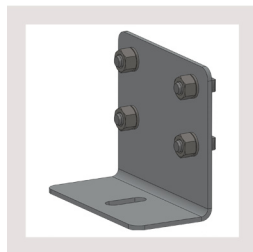


Ref.: 03096

Angle kit 600 mm
Ref.: 03136

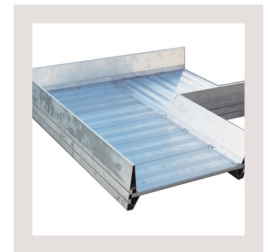

Angle kit 800 mm
Ref.: 03140

Guardrails on both sides
length 3000 mm for straight
gangway

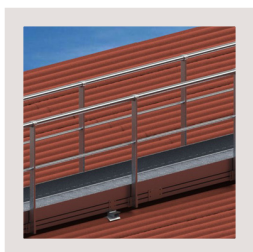

Ref.: 03106